

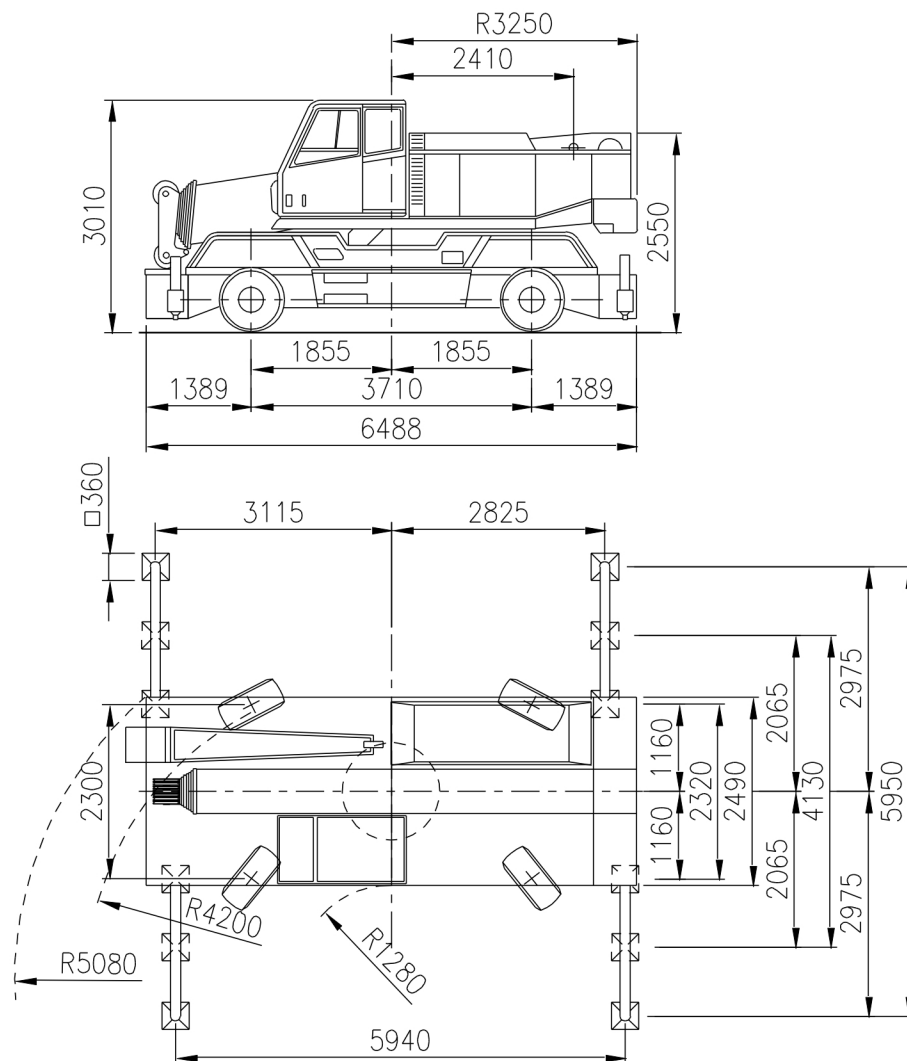


SWAEY

BROTHERS LTD

COMPACT TRUCK CT 2

35 TON



Axle load / Charge par essieu / Achslast / Aslast

: 2 x 12 t

(0 t)

Total weight / Poids total / Gesamtgewicht / Totaal gewicht

: 24 t

(0 t)

Tyres / Pneus / Bereifung / Banden

: 14.00 R 24



COMPACT TRUCK CT 2

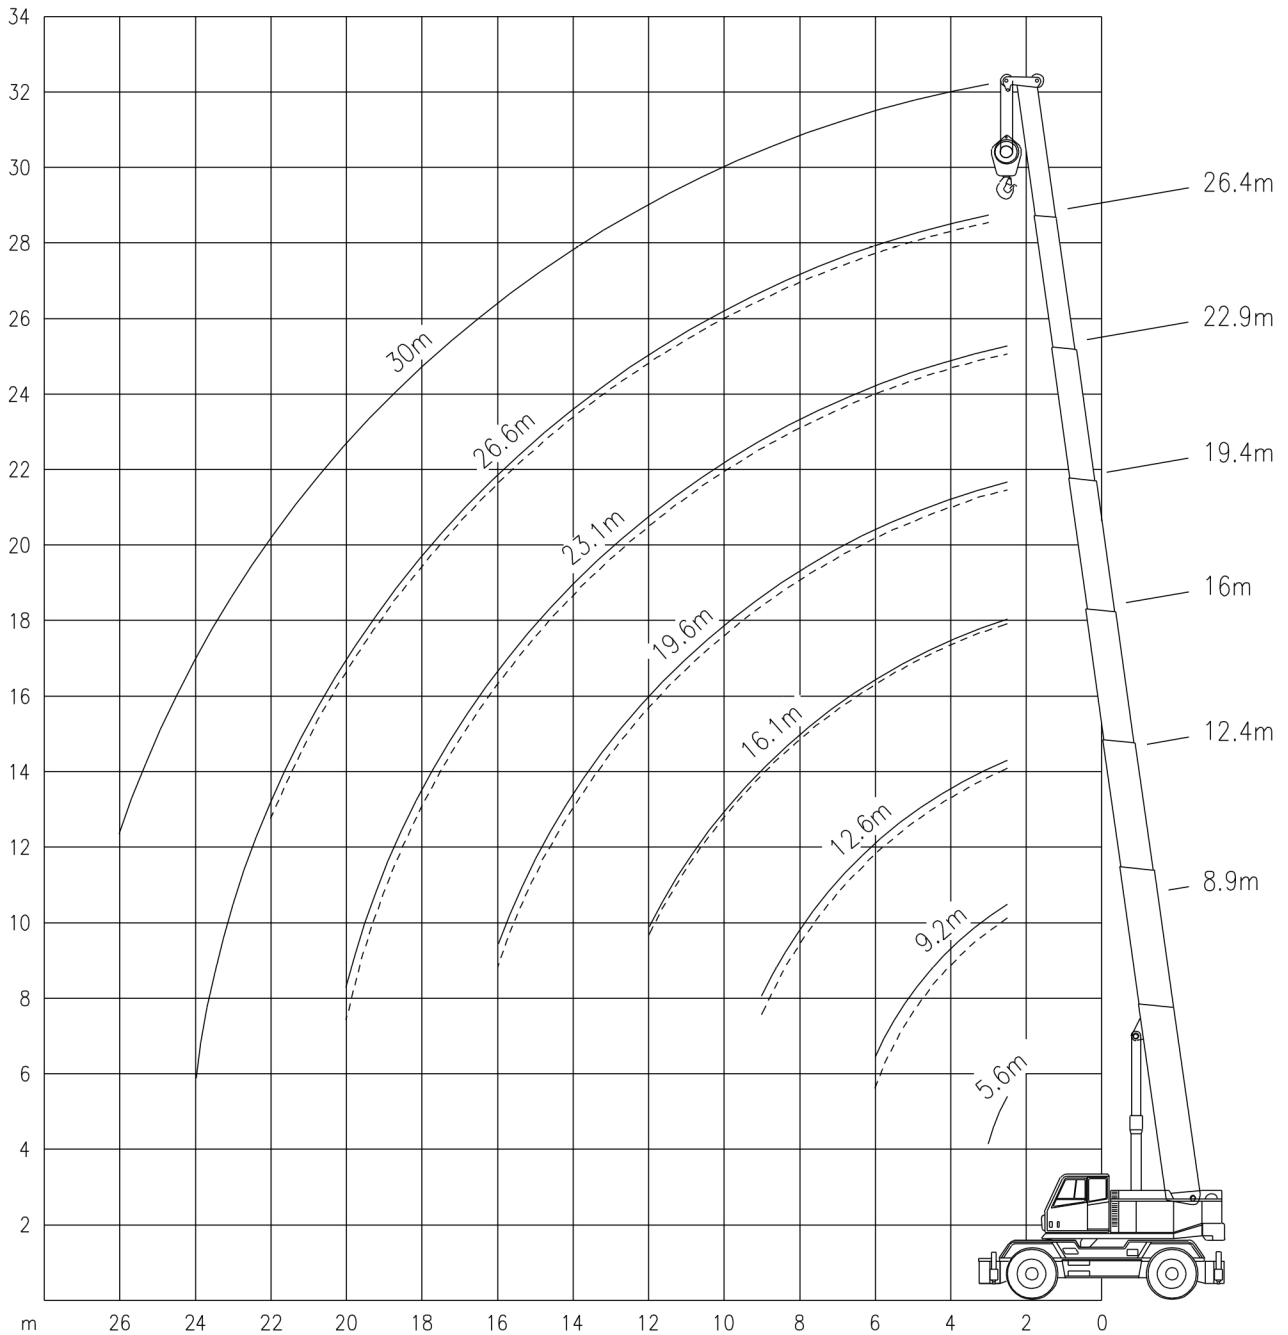
Working ranges
Portées

35 TON

Arbeitsbereiche
Werkbereich




Ha

1/200











COMPACT TRUCK CT 2

35 TON**Lifting capacities
Capacités****Tragfähigkeiten
Capacités****Ha****5.95m****3.2 t****360°****DIN
ISO****75%**

	5.6 m	9.2 m	12.6 m	16.1 m	19.6 m	23.1 m	26.6 m	30.0 m	5.6 m	8.4 m	12.4 m	16.0 m	19.4 m	22.9 m	26.4 m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
2.5	18.7	35.0	25.0	23.0	19.0	15.7	-	-	18.7	25.0	21.0	18.3	16.1	12.1	-
3.0	14.5	32.0	25.0	21.5	18.2	15.2	12.1	9.5	14.5	23.5	19.0	16.8	15.0	12.1	9.5
4.0	-	27.0	22.0	18.5	16.2	13.8	12.1	9.5	-	19.5	16.0	14.2	12.9	11.7	9.4
5.0	-	21.0	19.3	16.0	14.1	12.3	10.8	8.9	-	16.5	13.8	12.3	11.1	10.3	8.5
6.0	-	17.0	16.6	14.0	12.4	10.9	9.8	8.1	-	14.5	12.0	10.6	9.8	9.2	7.8
7.0	-	-	13.3	12.4	11.0	9.9	8.9	7.5	-	-	10.4	9.4	8.6	8.2	7.2
8.0	-	-	10.1	10.4	9.9	8.9	8.0	6.9	-	-	9.3	8.2	7.7	7.4	6.6
9.0	-	-	7.9	8.2	8.6	8.0	7.4	6.5	-	-	8.1	7.4	7.0	6.8	6.1
10.0	-	-	-	6.6	7.0	7.3	6.8	6.0	-	-	-	6.7	6.3	6.2	5.5
12.0	-	-	-	4.5	4.8	5.2	5.5	5.1	-	-	-	5.3	5.1	5.1	4.7
14.0	-	-	-	-	3.4	3.8	4.1	4.4	-	-	-	-	4.1	4.4	4.1
16.0	-	-	-	-	2.5	2.8	3.1	3.4	-	-	-	-	3.2	3.5	3.6
18.0	-	-	-	-	-	2.1	2.4	2.6	-	-	-	-	-	2.7	3.0
20.0	-	-	-	-	-	1.5	1.8	2.1	-	-	-	-	-	2.1	2.4
22.0	-	-	-	-	-	-	1.4	1.6	-	-	-	-	-	-	2.0
24.0	-	-	-	-	-	-	1.0	1.3	-	-	-	-	-	-	-
26.0	-	-	-	-	-	-	-	1.0	-	-	-	-	-	-	-

**Ha****4.13m****3.2 t****360°****DIN
ISO****75%**

	5.6 m	9.2 m	12.6 m	16.1 m	19.6 m	23.1 m	26.6 m	30.0 m	5.6 m	8.4 m	12.4 m	16.0 m	19.4 m	22.9 m	26.4 m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
2.5	18.7	32.8	25.0	23.0	19.0	15.7	-	-	18.7	25.0	21.0	18.3	16.1	12.1	-
3.0	14.5	29.2	25.0	21.5	18.2	15.2	12.1	9.5	14.5	23.5	19.0	16.8	15.0	12.1	9.5
4.0	-	22.0	21.4	18.5	16.2	13.8	12.1	9.5	-	19.5	16.0	14.2	12.9	11.7	9.4
5.0	-	14.3	14.1	14.4	14.1	12.3	10.8	8.9	-	15.0	13.8	12.3	11.1	10.3	8.5
6.0	-	10.0	9.9	10.2	10.5	10.9	9.8	8.1	-	10.5	10.8	10.6	9.8	9.2	7.8
7.0	-	-	7.3	7.6	7.9	8.3	8.6	7.5	-	-	8.1	8.4	8.6	8.2	7.2
8.0	-	-	5.6	5.8	6.2	6.5	6.9	6.9	-	-	6.3	6.4	7.0	7.3	6.6
9.0	-	-	4.3	4.6	4.9	5.3	5.6	5.9	-	-	5.0	5.4	5.7	6.0	6.1
10.0	-	-	-	3.6	3.9	4.3	4.6	4.9	-	-	-	4.4	4.7	5.0	5.3
12.0	-	-	-	2.3	2.6	2.9	3.2	3.5	-	-	-	3.0	3.3	3.6	3.9
14.0	-	-	-	-	1.7	2.0	2.3	2.6	-	-	-	-	2.4	2.6	2.9
16.0	-	-	-	-	1.0	1.3	1.6	1.9	-	-	-	-	1.7	2.0	2.2
18.0	-	-	-	-	-	0.8	1.1	1.4	-	-	-	-	-	1.5	1.7
20.0	-	-	-	-	-	0.5	0.7	1.0	-	-	-	-	-	1.1	1.3
22.0	-	-	-	-	-	-	0.4	0.7	-	-	-	-	-	-	1.0
24.0	-	-	-	-	-	-	-	0.4	-	-	-	-	-	-	-

**Ha****2.3m****3.2 t****360°****DIN
ISO****75%**

	5.6 m	9.2 m	12.6 m	16.1 m	19.6 m	23.1 m	26.6 m	30.0 m	5.6 m	8.4 m	12.4 m	16.0 m	19.4 m	22.9 m	26.4 m
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t
2.5	18.7	22.2	21.4	21.2	19.0	15.7	-	-	18.7	23.2	21.0	18.3	16.1	12.1	-
3.0	14.5	16.2	15.7	15.8	15.9	15.2	12.1	9.5	14.5	16.9	16.8	16.8	15.0	12.1	9.5
4.0	-	9.8	9.6	9.9	10.1	10.5	10.8	9.5	-	10.4	10.5	10.8	11.1	11.4	9.4
5.0	-	6.5	6.4	6.7	7.0	7.3	7.7	8.0	-	7.0	7.2	7.5	7.9	8.2	8.5
6.0	-	4.5	4.5	4.8	5.1	5.4	5.7	6.0	-	5.0	5.2	5.5	5.9	6.2	6.5
7.0	-	-	3.2	3.5	3.8	4.1	4.4	4.7	-	-	3.9	4.2	4.5	4.8	5.1
8.0	-	-	2.3	2.5	2.8	3.2	3.5	3.7	-	-	2.9	3.2	3.5	3.8	4.1
9.0	-	-	1.6	1.8	2.1	2.4	2.7	3.0	-	-	2.2	2.5	2.8	3.1	3.4
10.0	-	-	-	1.3	1.6	1.9	2.2	2.4	-	-	-	1.9	2.2	2.5	2.8
12.0	-	-	-	0.5	0.8	1.0	1.3	1.6	-	-	-	1.1	1.4	1.7	1.9
14.0	-	-	-	-	-	0.5	0.8	1.0	-	-	-	-	0.8	1.1	1.4
16.0	-	-	-	-	-	-	-	0.6	-	-	-	-	0.4	0.7	0.9
18.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.6




COMPACT TRUCK CT 2


35 TON

Lifting capacities
Capacités

Tragfähigkeiten
Capaciteiten



Ha




m	0°				360°			
	5.6 m	8.9 m	12.4 m	16.0 m	5.6 m	8.9 m	12.4 m	16.0 m
2.5	13.6	12.5	12.1	11.5	11.7	10.9	10.7	10.5
3.0	12.1	11.3	10.7	10.3	9.7	9.3	9.1	9.0
4.0	-	9.1	8.7	8.5	-	7.0	6.8	6.8
5.0	-	7.6	7.2	7.2	-	5.3	5.2	5.4
6.0	-	6.4	6.1	6.0	-	4.1	4.1	4.2
7.0	-	-	5.2	5.1	-	-	3.2	3.4
8.0	-	-	4.4	4.3	-	-	2.5	2.6
9.0	-	-	3.8	3.8	-	-	1.9	2.0
10.0	-	-	-	3.3	-	-	-	1.6
12.0	-	-	-	2.3	-	-	-	0.9

Working speeds
Vitesses de travail

Arbeitsgeschwindigkeiten
Werksnelheden

Mechanisms Mécanismes Antriebe Aandrijvingen	Speeds Vitesses Geschwindigkeiten Snelheden	Rope diameter Diamètre du câble Seildurchmesser Kabeldiameter	Single line pull Effort sur brin simple Zulässiger Seilzug je strang Toegelaten trekkraft / part	Length of ropes Longueur des cables Länge der Seile Kabellengte
Main hoist Levage sur flèche Hubwerk 1 Hijsslier 1	0 – 115 m/min	13 mm	29 kN	168 m
Telescoping hoist Treuil de télescopage Telewinde Telescooplier		15 mm	60 kN	33.2 m
Slewing gear Orientation Drehwerk Zwenkwerk	0 - 2.5 RPM			
Travel speed Vitesse sur route Fahrgeschwindigkeit Rijsnelheid	0 – 70 km/h			
Booming up Relever la flèche Aufwippen Optoppen	-8° - 81°			
Telescope Télescoper Teleskopieren Telescoperen	9.2 - 30m			

Hook Block / Crane hook
Crochet mouflé / Crochet simple



Unterflasche / Hakengehänge
Kraanblok / Kraanhaak

Capacity Capacité Tragfähigkeit Capaciteit	Number of sheaves Nombre de poulies Anzahl der Rollen Aantal schijven	Number of lines Nombre de brins Strangzahl Aantal parten	Weight Poids Gewicht Gewicht	"B"
SWL 20 t	3	7	280 kg	